

EP SERIES CARBON-BRIQUETTE CARTRIDGES

High dirt-holding capacity maximizes utilization of the carbon block
Greater chlorine reduction capacity than competitive 10-micron carbon blocks
Nominal 5-micron rating




EP Series cartridges are versatile and combine the long life of carbon block filtration with the higher dirt-holding capacity of wound, carbon-impregnated paper cartridges like our C-1.

EP Series cartridges are manufactured using a patented process* that yields a cartridge with a nominal 5-micron filtration rating, high dirt-holding capacity and greater chlorine taste & odor reduction capacity than competitive 10-micron carbon blocks. A high porosity design helps prevent the cartridge from plugging before its adsorption capacity is exhausted, maximizing the utilization of the carbon while maintaining low pressure drop.

EP Series cartridges are manufactured entirely from FDA-compliant materials making them an ideal choice for a wide range of residential, food service, commercial and industrial applications.

EPSILON SERIES

Carbon-Briquette Cartridges

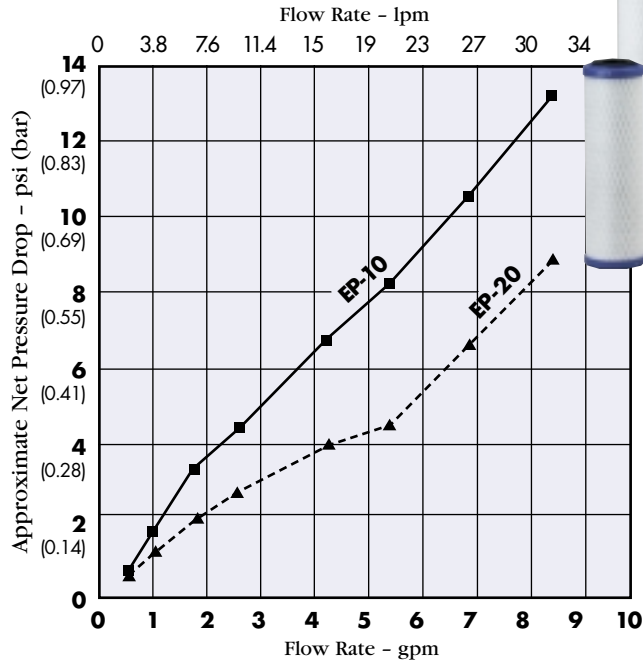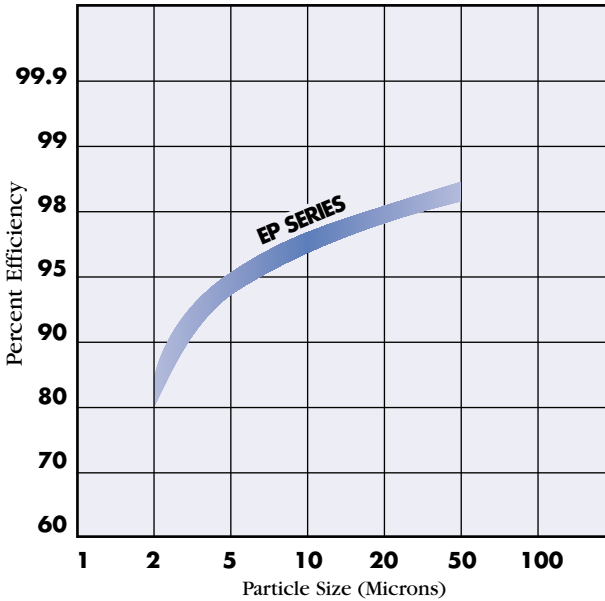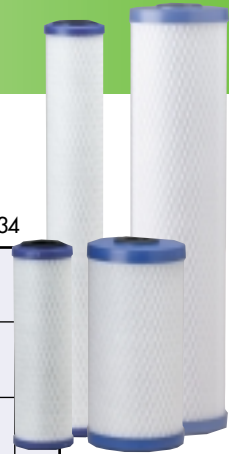

This EP-10, EP-20, EP-BB and EP-20BB are Tested and Certified by NSF International under ANSI/NSF Standard 42 for material requirements only.

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating (Nominal)	Initial ΔP (psi) @ Flow Rate (gpm)	Chlorine: Taste Odor Reduction @ Flow Rate (gpm)
EP-10	2-7/8" x 9-3/4" (73 mm x 248 mm)	5	1.35 psi @ 1 gpm (0.09 bar @ 3.8 lpm)	>6,000 gallons @ 1 gpm (22,700 liters @ 3.8 lpm)
EP-20	2-7/8" x 20" (73 mm x 508 mm)	5	1.42 psi @ 2 gpm (0.10 bar @ 7.6 lpm)	>12,000 gallons @ 2 gpm (45,400 liters @ 7.6 lpm)
EP-BB	4-5/8" x 9-3/4" (118 mm x 248 mm)	5	1.6 psi @ 2 gpm (0.11 bar @ 7.6 lpm)	>22,000 gallons @ 2 gpm (83,300 liters @ 7.6 lpm)
EP20-BB	4-5/8" x 20" (118 mm x 508 mm)	5	2.5 psi @ 4 gpm (0.17 bar @ 15.1 lpm)	>40,000 gallons @ 4 gpm (151,400 liters @ 15.1 lpm)

Materials of Construction

- Filter Media** Bonded PAC
- End Caps** Polypropylene
- Inner/Outer Wraps** Polypropylene
- Netting** Polyethylene
- Gaskets** Buna-N
- Temperature Rating** 40°F to 180°F (4.4°C to 82.2°C)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
NOTE: The EP cartridges will contain a very small amount of carbon fines (very fine black powder) and a new cartridge after installation should be flushed with sufficient water to remove the fines from your water system before using the water.
NOTE: Micron ratings based on 85% or greater removal of given particle size. Data obtained from actual particle counts using AC Fine Test Dust and Latex spheres.
NOTE: Estimated capacity using 2ppm free available chlorine (FAC) at continuous flow with greater than 90% reduction.

* U.S. Patent No. 5,976,432 & 5,823,668



502 Indiana Avenue • Sheboygan, WI 53081
 USA/Canada: 800-645-0267 phone • 888-203-7361 fax
 International: 920-451-9322 phone • 920-457-2417 fax



www.plymouthwater.com
 Printed in U.S.A. 01/02 310077